


IRON POWDER CORE SERIES PRODUCTS


Toroidal Cores

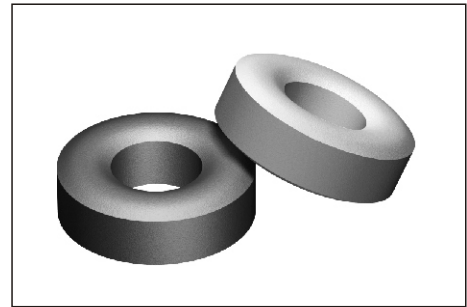


STANDARD SPECIFICATIONS

Part Number	A_L nH/N ²	OD mm	ID mm	HT mm	Le cm	Ae cm ²	V cm ³
KT200-2	12.0	50.8	31.8	14.0	13.0	1.27	16.4
KT200-2/93	12.0	50.8	31.8	14.0	13.0	1.27	16.4
KT200-3	42.5	50.8	31.8	14.0	13.0	1.27	16.4
KT200-6	10.0	50.8	31.8	14.0	13.0	1.27	16.4
KT200-7	10.5	50.8	31.8	14.0	13.0	1.27	16.4
KT200-8	42.5	50.8	31.8	14.0	13.0	1.27	16.4
KT200-8/93	42.5	50.8	31.8	14.0	13.0	1.27	16.4
KT200-18	67.0	50.8	31.8	14.0	13.0	1.27	16.4
KT200-26	92.0	50.8	31.8	14.0	13.0	1.27	16.4
KT200-33	37.0	50.8	31.8	14.0	13.0	1.27	16.4
KT200-40	79.0	50.8	31.8	14.0	13.0	1.27	16.4
KT200-52	92.0	50.8	31.8	14.0	13.0	1.27	16.4
KT200-2B	21.8	50.8	31.8	25.4	13.0	2.32	30.0
KT200-2B/93	21.8	50.8	31.8	25.4	13.0	2.32	30.0
KT200-8B	78.5	50.8	31.8	25.4	13.0	2.32	30.0
KT200-8B/93	78.5	50.8	31.8	25.4	13.0	2.32	30.0
KT200-18B	120.0	50.8	31.8	25.4	13.0	2.32	30.0
KT200-26B	160.0	50.8	31.8	25.4	13.0	2.32	30.0
KT200-40B	142.0	50.8	31.8	25.4	13.0	2.32	30.0
KT200-52B	155.0	50.8	31.8	25.4	13.0	2.32	30.0
KT201-18	164.0	50.8	24.1	22.2	11.8	2.81	33.2
KT201-26	224.0	50.8	24.1	22.2	11.8	2.81	33.2
KT201-40	194.0	50.8	24.1	22.2	11.8	2.81	33.2
KT201-52	224.0	50.8	24.1	22.2	11.8	2.81	33.2
KT224-26C	155.0	57.2	31.8	19.1	14.0	2.31	32.2
KT224-52C	155.0	57.2	31.8	19.1	14.0	2.31	32.2

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS



TYPICAL PART No.

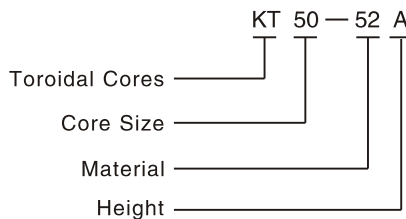

Le: Mean Magnetic Path Length
 Ae: Cross Section Area
 Ve: Core Volume